

Product Name: Lehman 38 Surface
Product Code: MS 38
Model No: 13538001

Product Specification / Ürün Özellikleri

Lehman 38 Surface

Installation Type : Surface Mounted

Body and Heatsink : Aluminium Extrusion Body

Diffuser Options : Opal Polycarbonate

Body Color : Electrostatic Powder Coating

Led Brands : Osram / Samsung

Driver Brands : Tridonic / Helvar / Meanwell 24V

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:36mm W:38mm

Lehman 38 Sıva Üstü

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde

Difüzör Çeşitler : Opal Polikarbon

Gövde Rengi : Elektrostatik Toz Boya

Led Markaları : Osram / Samsung

Sürücü Markaları : Tridonic / Helvar / Meanwell 24V


Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:36mm G:38mm

	Length - Uzunluk	Line - Sıra	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram	0600mm	1	1568 lm	1693 lm	1943 lm	16 Watt	>82
Osram	1200mm	1	3136 lm	3386 lm	3636 lm	32 Watt	>82
Osram	2400mm	1	6272 lm	6772 lm	7272 lm	64 Watt	>82
Osram	1200mm	2	4668 lm	4868 lm	5168 lm	46 Watt	>82
Osram	2400mm	2	9336 lm	9736 lm	10336 lm	92 Watt	>82
Samsung 24V	0600mm	1	620 lm	640 lm	680 lm	8 Watt	>82
Samsung 24V	1200mm	1	1240 lm	1280 lm	1360 lm	16 Watt	>82
Samsung 24V	2400mm	1	2480 lm	2560 lm	2420 lm	32 Watt	>82

Technical Informations / Tekniksel Bilgiler

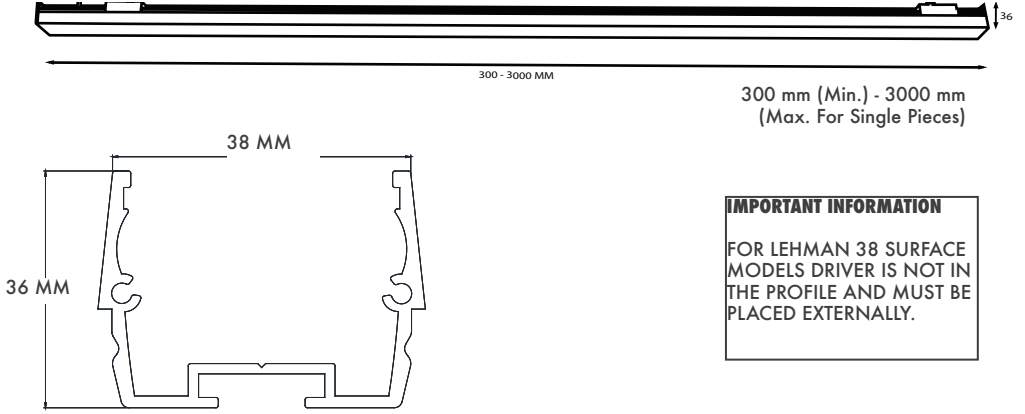

300 mm (Min.) - 3000 mm
(Max. For Single Pieces)

Available Finishes
Uygulama Renkleri



Textured White Ral 9016



Textured Black Ral 9005




Textured Grey Ral 9006



*Please check datasheet for more finishes.

*Daha fazla renk için lütfen datasheeti inceleyiniz.

Beam Informations/ Açısal Bilgiler




110°


Additional / Ek Bilgiler



Product Name :
1-3 Hours Emergency Battery
(Tridonic / Local Brands)



Product Name :
Microprismatic Diffuser (3D)



Product Name :
Fire-Proof Diffuser



Product Name :
Urth Cable + 3 Pin Connector
with Urth Protection

